


How to install: Garage Door Window

Step 4: Caulk and Attach Front Window

Whenever you install a new window it will be exposed to the weather, so you will need to add some protection – this can be achieved by using caulk. Without doing this, the elements will be able to enter the garage through the window. All you need to do is line waterproof caulk around the edges of the window before inserting it into the door. Line each side of the window with caulk, and then fit the window in place. Any residue caulk should be wiped away using a rag. (you may need to reverse the back depending on the thickness of your door and may need to add a spacer)



Step 5: Enjoy your New Window


Enjoy your new window or continue to install any remaining windows.

How to install: Garage Door Window

A garage door window can be an excellent addition to a garage, it will offer extra natural light during the daytime in addition to the artificial light. They are pretty easy to install, using some simple tools and basic knowledge of their workings – you too can install a window in your garage door in little time.

Step 1: Take Measurements

A garage door window must be the correct size, so that it fits in your door. It must fit inside one panel on your garage door, which is why it can be no bigger than the panel it is to be installed in. They are small and made of durable plastic so that they can survive the process of the garage door opening and closing. Choose where on the garage door you'd like to place your new window (generally mounted high on the garage door). After choosing the location for the window, take measurements of the panel in which you wish to add your window. (Rough out dimensions/size of hole needed to place the window into)

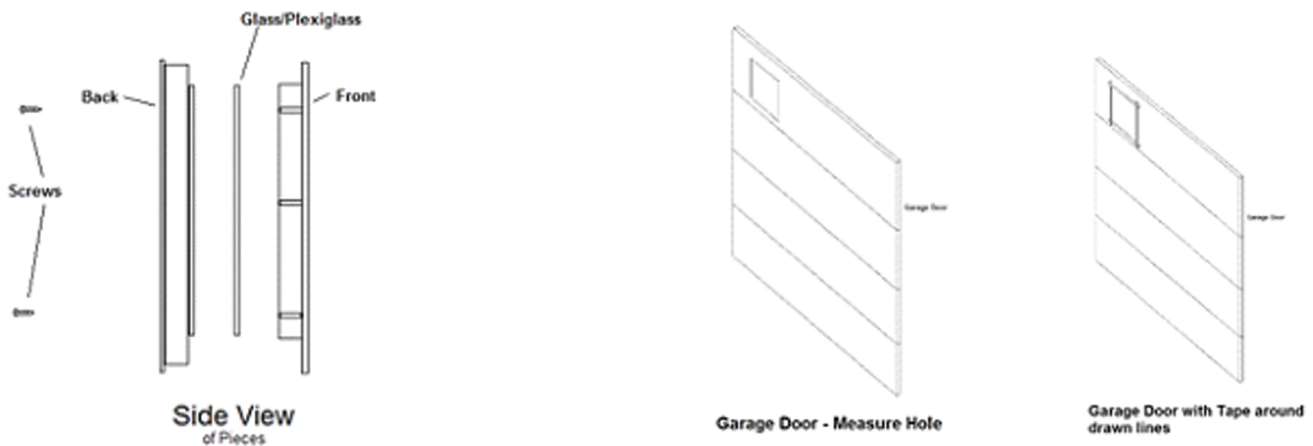

Step 2: Mark the Spot for the Window

After you have your measurements for the garage door panels, you need to mark the opening of the window on the panel you plan to install the window into. The back of the window to be installed will go through the door, while the front of the window is attached to the back of the window with the supplied screws thus sandwiching the door of the garage. Therefore, you will need to make an opening in the panel of the garage door – large enough for the back of the window. You should measure the back of the window and then mark a rectangle using a pencil on the door. After marking this rectangle, apply masking tape to the rectangle in-order to guide you when you are cutting the panel.



Step 3: Use Jigsaw to Cut Openings

Using a Jigsaw, cut an opening for each window you wish to insert. Follow the inside of the masking tape to cut the hole the same size as the window. Make sure you have the measurements correct, since if you cut a hole larger than the window, the entire hole will be of no use.